




TJBT CAPILLARY THERMOSTAT

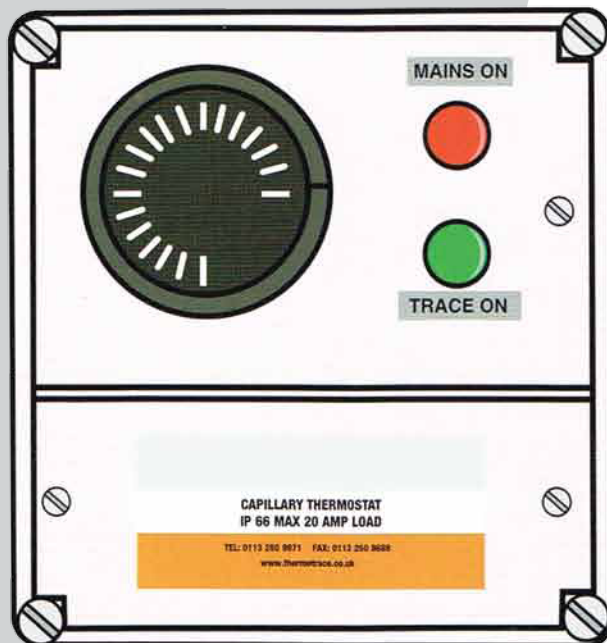

TECHNICAL SPECIFICATION

Thermostat:	TJBT/1	TJBT/2	TJBT/3	TJBT/4
Temperature Range:	0 to 40°C	0 to 120°C	0 to 210°C	0 to 300°C
Switching Differential:	2°C + 1°C	4°C + 1°C	7°C + 2°C	9°C + 2°C
Max Sensor Temp:	50°C	150°C	250°C	350°C
Max Housing Temp:	100°C	100°C	100°C	100°C
Sensor Type:	Liquid filled capillary tube and sensing bulb			
Sensor Material:	Copper	Copper	Copper	Copper
Capillary Length:	1000mm	900mm	900mm	900mm
Switch Type:	Single Pole	Single Pole	Single Pole	Single Pole
Switch Rating:	15A/240V 10A/380V	15A/240V 10A/380V	15A/240V 10A/380V	15A/240V 10A/380V
Housing Material:	Polycarbonate enclosure with a clear lid			
Cable Entries:	4 x M20	4 x M20	4 x M20	4 x M20
Overall Dimensions:	150mm wide x 150mm long x 75mm deep			
Weather Protection:	IP66	IP66	IP66	IP66
Neon Indication:	Red – Mains On / Amber – Tracer On			

Ancillary Equipment: PB/BK –A galvanised steel pipe mounting bracket & fixings